



MERCHANT BAR REFERENCE GUIDE: TAPERED FLANGE BEAMS

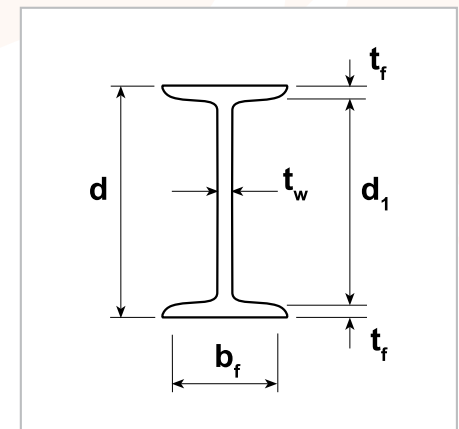

Designation	Weight	Surface Area	Depth of Section d	Width of Flange b_f	Thickness of Flange t_f	Web Thickness t_w	Depth between Flanges d_1
	kg/m	m ² /m	mm	mm	mm	mm	mm
125TFB	13.1	0.470	125	65	8.5	5.0	108
100TFB	7.2	0.349	100	45	6.0	4.0	88

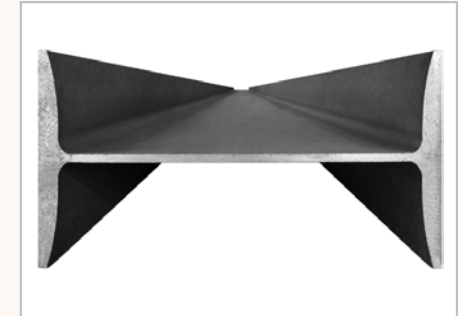

- Manufactured in accordance with the requirements of Australian Standard AS/NZS 3679.1 2016 in Grade 300.
- Grade 350 & 350L0 available on request.
- Non-standard lengths or cut to size on request.

